

07/2025

	contains	m <sup>2</sup>	ft <sup>2</sup>	weight
1 pack Cadenza V4	9 planks	2,66 m <sup>2</sup>	28.67 ft <sup>2</sup>	19,4 kg
1 pallet Cadenza V4	56 packs	149,16 m <sup>2</sup>	1605.60 ft <sup>2</sup>	1098 kg

## product specifications


dimensions mm / inch	1383 x 214 mm / 54.45" x 8.43"
total thickness mm / inch	8 mm/ 0.31"
bevels	4
loc system	DuoLoc
level of use according to European standard EN10874	23 heavy domestic use
	32 general commercial use
residential warranty	20 years
commercial warranty	3 years

## composition

surface layer	direct laminated paper, impregnated with melamine resin
substrate	moisture resistant High Density Fiberboard (HDF)
backing	direct laminated paper, impregnated with melamine resin

## test results

abrasion resistance	ISO 24338 A	AC4 (IP ≥4000)
impact resistance	EN 17368/EN 13329	small ball : ≥ 35 mm - big ball : ≥ 600 mm
thickness swelling	ISO 24336	≤ 18%
fire resistance	EN 13501-1	Cfl-S1
formaldehyde emission	EN 717-1	E1
slip resistance	EN 13893	DS
density	EN 323	900 kg/m <sup>3</sup>
resistance to staining	EN 438	5 (groups 1+2) ; 4 (group 3)
effect of a furniture leg	EN ISO 16581	no damage (foot type 0)
effect of a castor chair	EN ISO 4918	no damage with type W wheels, 15.000 cycles
thermal resistance in combination with underlay Excellence Plus	ISO 8302	0,08 m <sup>2</sup> K/W – Suitable for floor heating/cooling. Detailed instructions on <a href="http://www.berryalloc.com">www.berryalloc.com</a> .




product leaflet  
installation manual  
warranty conditions  
care&maintenance  
floor heating manual  
underlay guide



07/2025

## What is a laminate floor made of?

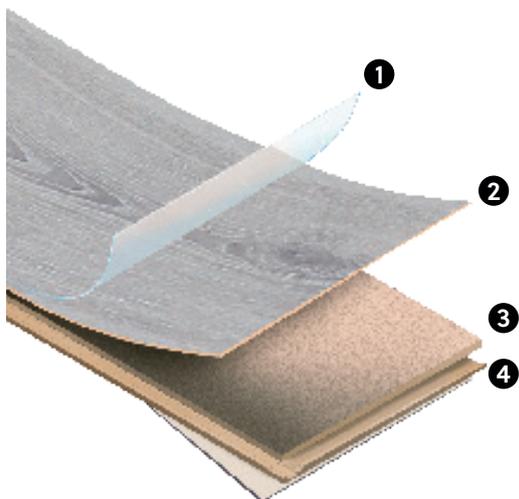

- ❶ An **overlay** that determines the strength and resistance of your floor
- ❷ A **decor paper** for the design
- ❸ A **high-density fibreboard (HDF)** core
- ❹ A **counterbalance** to stabilise and protect the HDF core